TOTO_®

MS970CEMFG

Washlet® with Integrated Toilet G500, 1.28 GPF and 0.9 GPF

FEATURES

- 3D Tornado[™] flushing system, high efficiency (1.28GPF/4.8LPF & 0.9 GPF/3.4 LPF.)
- CeFiONtect[™] ceramic glaze prevents debris and mold from sticking to ceramic surfaces, leading to fewer chemicals and less water in cleaning.
- Universal height.
- Skirted design.
- Elongated front bowl.
- 12" Rough-In
- Auto lid open/close, auto flush
- Convenient slim wireless remote, with illuminated touch pad.
- Heated seat with temperature control.
- Gentle Aerated, Warm Water, Dual Action Spray with oscillating and pulsating feature
- Adjustable water temperature and volume
- Warm air drying with five variable temperature settings
- Automatic air deodorizer
- Energy saver timer.
- Built-in air purifying system.

MODELS

 MS970CEMFG With CeFiONtect ceramic glaze

COMPONENTS

- SN970M Washlet Unit
- CT970CEMFG Elongated Bowl with CeFiONtect

COLORS/FINISHES

#01 Cotton
#12 Sedona Beige

PRODUCT SPECIFICATION

The G500 uses TOTO's 3D Tornado flushing system. Toilet shall be 1.28GPF/4.8LPF and 0.9 GPF/3.4 LPF. Toilet shall have CeFiONtect ceramic glaze. Toilet shall be of skirted design, elongated front bowl with auto open and close seat with universal height. Toilet shall be TOTO Model MS970CEMFG_____.





CeFiONtect 3D Tornado

CODES/STANDARDS

- Meets and exceeds ASME A112.4.2, ASME A112.19.2/CSA B45.1, ASME A112.18.1/CSA B125.1, UL 1431, CSA C22.2 # 68
- Certifications: IAPMO(cUPC), State of Massachusetts, City of Los Angeles and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- ADA Compliant




MS970CEMFG

Washlet[®] with Integrated Toilet G500, 1.28 GPF and 0.9 GPF

SPECIFICATIONS

Water Use: Flush System: Water Supply:	1.28 Gpf/4.8 Lpf with alternate 0.9 Gpf/3.4 Lpf 3D Tornado Siphon Jet Min 7.25PSI(0.05MPa) Dynamic Max 108.5PSI (0.75MPa) static		Temperature of Washing Spray Minimum: 86° F/30° C Maximum: 104° F/40° C Water heater Capacity: 250W Water heater tank volume:
Water Surface:	5-3/8" × 4-5/8"		25.6 oz (0.78L)
Trap Diameter:	2" (51 mm)		Safety Features: Temperature fuse,
Rough In:	12" rough in		Bi-metal sensor (auto reset), and
	Warning: If there is a base board in the rest room, the center of the floor drain should be	Daria a Frantsau	Float switch (prevent boil)
	a minimum of 12" from the base board.	Drying Feature	Air Temperature: High: About 140°F/60°C
Trap Seal:	2-1/8" (54 mm)		Low: About 95°F/35°C
Warranty:	One Year Limited		Capacity of Air: 9.54 ft ³ /min
Material:	Bowl: Vitreous china		Safety Feature: Temperature Fuse
	Seat and cover: Plastic	Seat Warming Feature	Surface Temperature:
Shipping Weight:	CT970CEMFG 90Lbs SN970M 22Lbs		Minimum: 82° F/28° C
Shipping Dimensions:	CT970CEMFG 29"x16"x17-1/8"		Maximum: 97° F/36° C
Shipping Dimensions.	SN970M 31-1/8"x17-3/4"x11-7/8"		Safety Feature: Thermal fuse
Power Rating	120V AC, 60 Hz. 406W	Ambient Temperature	Range: 33°F/1°C to 104°F/40°C
Power Cord	Maximum length: 3.6ft (110 cm)		
Water Feature	Adjustable Water Flow Rate		
	Rear washing: from 10.24 to		
	20.48 oz/min.		
	Soft washing: from 10.24 to 20.48 oz/min.	11-3/	8"
	Front washing: from 8.96 to	(290m	m) Water supply on the wall
	20.48 oz/min.		
		(150mm)	

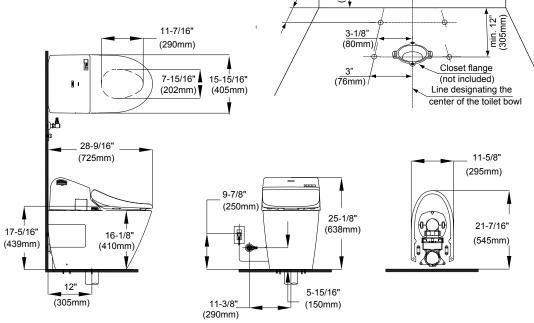

TOTO_®

These dimensions and specifications are subject to change without notice